

MULTI-SEPARATOR - TYPE: SSE

Small but separates like a pro!


The multi-separator from SCHUMA is used for sorting sprues directly at the injection moulding machine or after a conveyor system. Sorting is done according to the difference in height between sprue and moulding. The mouldings are removed at the side using a screw roller. Depending on the requirement, we manufacture the SSE for you in a left or right-hand discharge direction. The separating gap can be infinitely adjusted without tools in a few seconds. The SSE can therefore be used with different parts to be separated. Thanks to the option of infinitely adjusting the height by means of adjustable telescopic feet, the height is freely selectable as required. Loosening spikes built into the screw prevent parts from getting stuck or jammed during the separating process.

Technical data

Separating gap	3 - 110 mm
Electrical connection	230V / 50Hz
Motor	Planetary gear motor
Loosening spike	3/4/5
Plug	Schuko
Height	approx. 570 - 970 mm
Width	500, 600 or 700 mm
Length	approx. 390 mm
Speed	constant / variable
Flight depth of the screws	standard 3 - 6/8/11 when required
Paintwork	Black (RAL 9005) or Light grey (RAL 7035)



Simple adjustment of the separating gap.

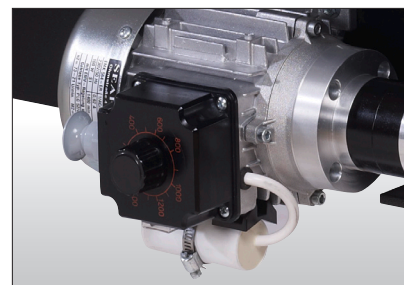

Motor with speed control.



Infinitely variable height adjustment.